

# Rack Mount LCD

## Rack Mount LCD



15" (7U)

### Specifications


**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	R15T600-RKA1
Viewable Size Image	15"
Active Display Area(mm)	304.128(H) x 228.096(V)
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Number of Pixels	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bits+FRC)
Brightness(cd/m <sup>2</sup> )	550
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	35W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW,IR

Remarks:R15T600 series= VGA input only

R15T630 series= VGA+Video Input

### Mechanical Drawing

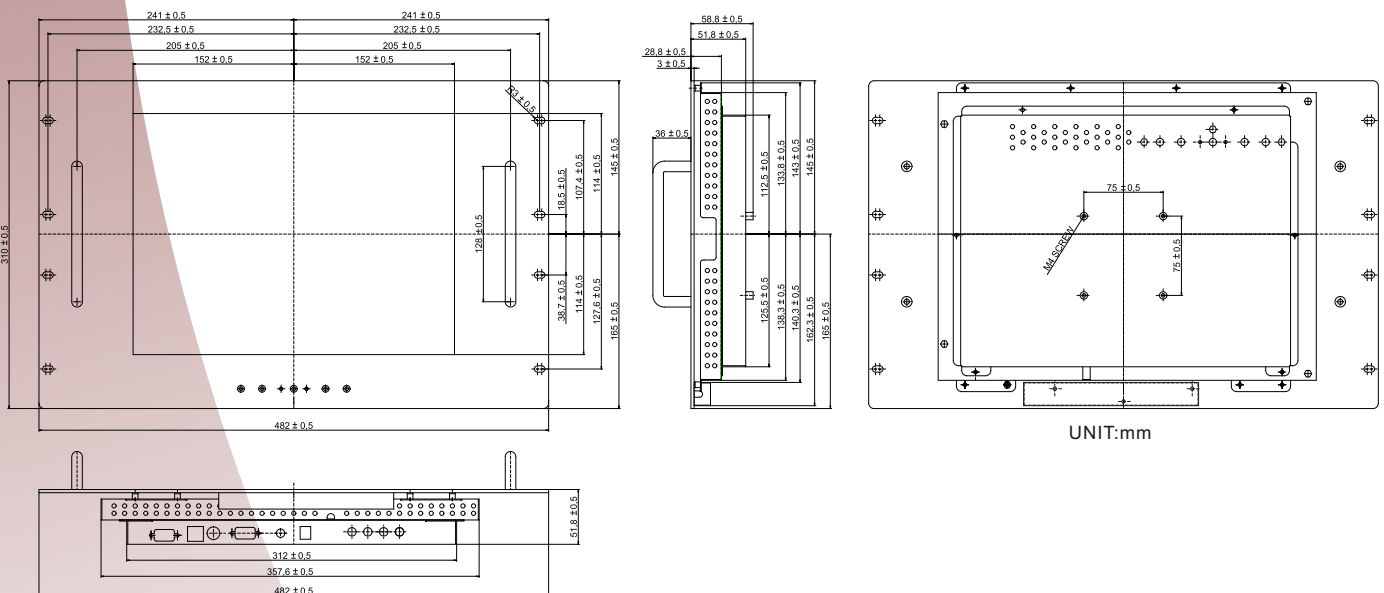

\* Note: this is a simplified drawing and some components are not marked in detail.  
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Dec-03-08
1.1	Spec change	Aug-04-11